INTEGRATED WATER RESOURCES MANAGEMENT IN LAO PDR

Water is essential to life and culture in the People's Democratic Republic of Lao. More

than third of GDP and 75% of employment comes from subsistence agriculture, which is heavily dependent on rainfall and Lao's rivers.

Traditionally, the People's Democratic Republic of Lao (Lao PDR) was considered a water rich country, but increasing

demand for water, especially in the dry season is putting pressure on water resources. Climate change is also affecting the region, with water quality impacted by rising temperatures and water infrastructure at risk from increased flash flooding.

In response, the Government of Lao PDR is implementing a series of water reforms, including developing a National Water Resources Strategy and Action Plan 2016-2020 and major amendments to the Water and Resources Law were approved in 2017. The new law focuses on better protection of water resources and sustainable use to support national economic development.

Supporting these reforms is the World Bank funded Mekong Integrated Water Resource Management (MIWRM) program, which seeks to establish good examples of integrated water resources management practice at the local, regional and river basin scales.




Landscape view over Xe Don river in Pakse, Laos (credit: Marek/AdobeStock)

The project

eWater was engaged under the MIWRM program to support the Lao PDR Natural Resources and Environment Research Institute (NRERI) Hydrological Modelling Unit to build its capability to develop and apply water models for water resource assessment, sustainable water management and to support policy and investment decision making.

Surface water resource models for four basins; Xe Bang Fai, Xe Bang Hieng, Xe Don and Xe Kong were built and calibrated using the eWater Source platform. The models were used to evaluate:

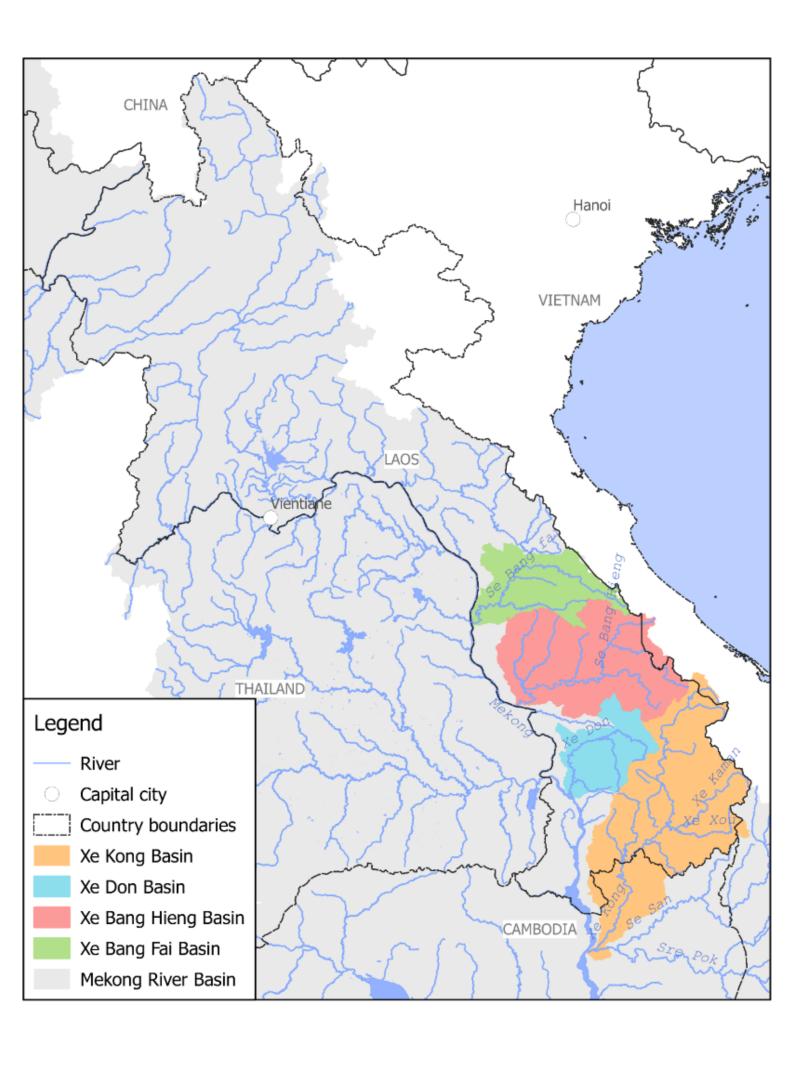

- total water availability from surface runoff
- inter-basin water transfers
- water demands and consumption for domestic, industrial and agriculture users
- hydropower operations and production.

Water supply and demand were summarised on a monthly basis and the impacts of water resource development on natural flow patterns were evaluated.

In addition, to understand the relative impacts of different water resources development options in the Xe Kong basin, four development scenarios were assessed:

- 1. current (2017) conditions
- 2. hydropower development
- 3. irrigation development
- 4. combined development.

Each scenario was evaluated under historical climate conditions and a climate change scenario. This initial assessment seeks to demonstrate the power modelling can bring to the decision-making process and inform the development of a later detailed scenario assessment.

Overcoming data constraints

Traditionally, good water modelling relies on high-quality, measured data. However, such data is often uncommon in countries such as Lao PDR. To address this, much of the data used in the modelling came from global, remotely sensed data sets, calibrated against the limited measured data.


Despite the limited measured data, good calibration was achieved in all four basins, demonstrating that the Source model platform is an effective tool for low-data environments. Importantly, Source has the ability to incorporate additional data as it becomes available, progressively increasing reliability and accuracy over time.

Implementation

The project has helped to increase the capacity of water managers in Lao PDR to build and use water models. The four models build for the project give water managers vital information and new tools for responding to emerging water management challenges, such as:


- annual and seasonal water availability
- annual and seasonal water flow patterns, and how these vary from natural conditions
- annual and seasonal water usage
- actual and potential water shortages
- hydropower demands and impacts on flow patterns and water balance

Example outputs from the model are shown in the figures below, they provide easy to understand, practical information to guide decision making.

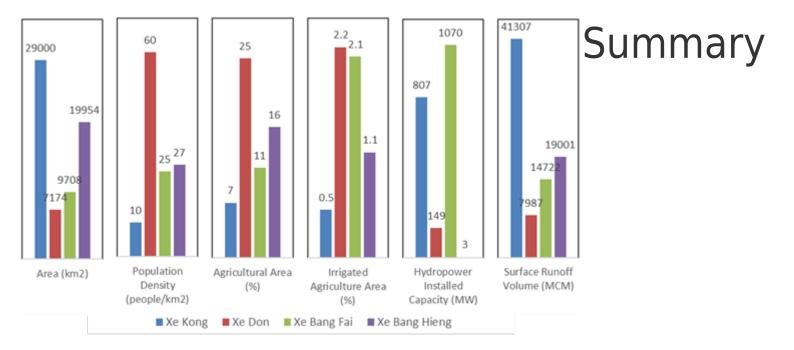

of basin characteristics.

NB: For Xe Bang Fai the installed capacity represents the NamTheun 2 hydropower project, which is located outside of the basin and diverts water into the basin.

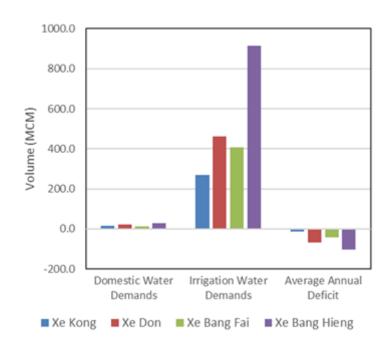

Summary of average annual water demands and the deficit in supply (represented as negative values) for the four basins.

Capacity building

Building the capability of the NRERI Hydrological Modelling team was a core focus of the project. eWater provided tailored Source training and worked closely with the team in building the four models and developing the scenarios to be tested.



Participa

Back Row (L to R): Mr Daryl FIELDS (World Bank), Mr Chusit APIRUMANEKUL (World Bank), Mr. Somephone KHANPHANH (LNMC), Ms Phatthary KEOBOUNKHONG (DEPP), MR Khamphouay SIVONGXAY (Dept. of Water Resources), Ms Rachel BLAKERS (eWater), Mr Oulaphone ONGKEO (NRERI), Dr Thanapon PIMAN (Research Fellow), Dr Robert CARR (eWater), Mr Visanou METTHANY (Dept. of Meteorology & Hydrology), Mr Amphone CHOMXAITHONG (University of Laos), Mr Somphone KHONGSAP (Dept. of Planning & Cooperation), Mr Adnada BOULOM (Dept. of Transportation), Mr Phongsavath YINGYONG (NRERI)

Front Row (L to R): Mr Bounny CHAYAVONG (NRERI), Mr Pankham SOUNDARA (NRERI), Mr Soulivanh LATHSAPHON (Dept. of Irrigation), Ms. Manysakhon CHITTHAPHONG (NRERI), Ms. Pakayphone YORDCHALEUN (NRERI), Ms. Nongnout PHANPHONGSA (NRERI), Ms. Souphada SENGVILAY (NRERI),

nts at a workshop to develop scenarios for the Xe Kong basin. Attendees were from NRERI, other Lao PDR government agencies, the World Bank and eWater